


YS501-AW

Carton Sealer with side belts
drive and flap-closer

properties


The YS501AW is a Carton Sealer with manual adjustment. You can easily place it to the left or right. The machine is suitable for serial closing of American folding boxes with tape on the top and underside. This machine has a simple flap-closer for closing the top flaps. Professional finish guaranteed by pressure rollers for pushing flap openings together. The box is moved to the machine along side conveyor belts. Adjustment is easy and fast using the handles.

technical specifications



	MIN.	MAX.
L	150 mm	∞
W	100 mm	490 mm
H	120 mm	480 mm

- **Tape:** PVC or PP;
width max. 75 mm;
core 76 mm;
overlap 40-55 mm.
- **Low noise tape-heads.**
- **Transport speed:** 20 m/min.
- **Ambient temperature:** +5 tot 45 °C.
- **Power:** 230 V/1~N/50 Hz,
0,4 kW.
- **Protection:** IP54.

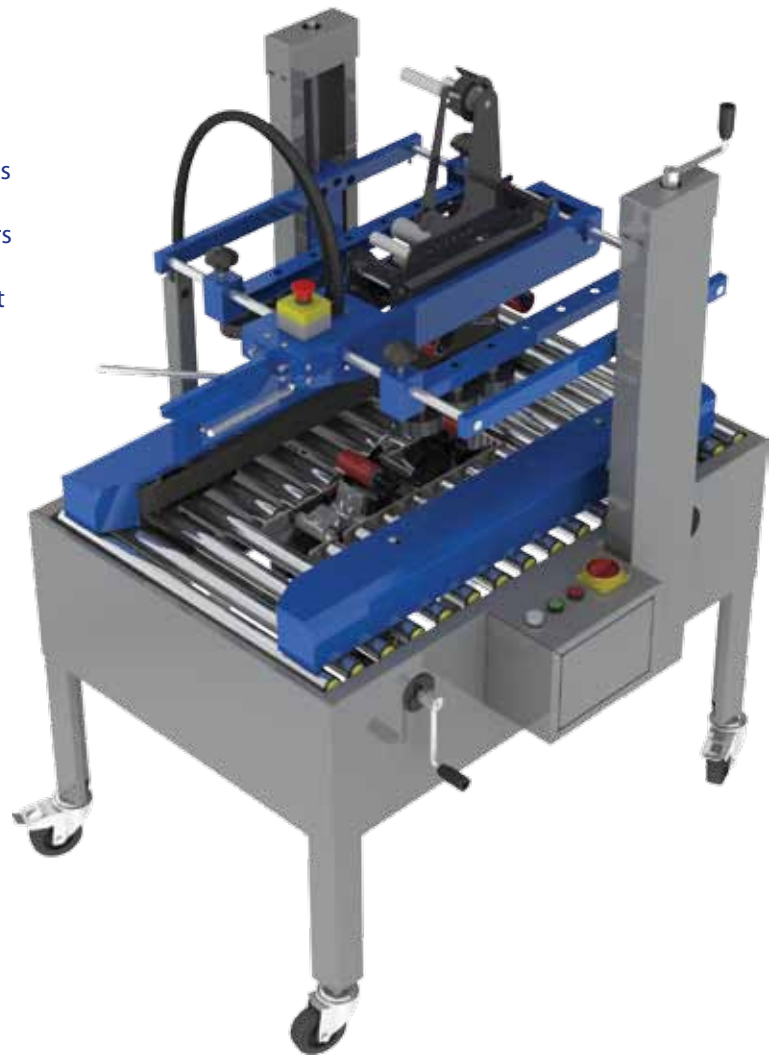

optional accessories

- Machine for deviating box sizes (available on request).
- Stainless steel finish.
- Deviating working height.
- 400 V/3~N design.
- Castors with brakes (+137 mm).
- Tape unit 50 mm instead of the standard 75 mm tape unit.
- Extra tape unit 50 mm.
- Extra tape unit 75 mm.
- Roller conveyors.

